


Metal	Channel Width	Part Numbers
Hot-Dip Galvanized Steel	2	OCV2-GC2-DDA5
	4	OCV4-GC2-DDA5
	6	OCV6-GC2-DDA5
Natural Finish Aluminum	2	OCV2-NA2-DDA5
	4	OCV4-NA2-DDA5
	6	OCV6-NA2-DDA5
Stainless Steel T-304	2	OCV2-SS2-DDA5T4
	4	OCV4-SS2-DDA5T4
	6	OCV6-SS2-DDA5T4
Stainless Steel T-316	2	OCV2-SS2-DDA5T6
	4	OCV4-SS2-DDA5T6
	6	OCV6-SS2-DDA5T6

ALL DIMENSIONS IN INCHES

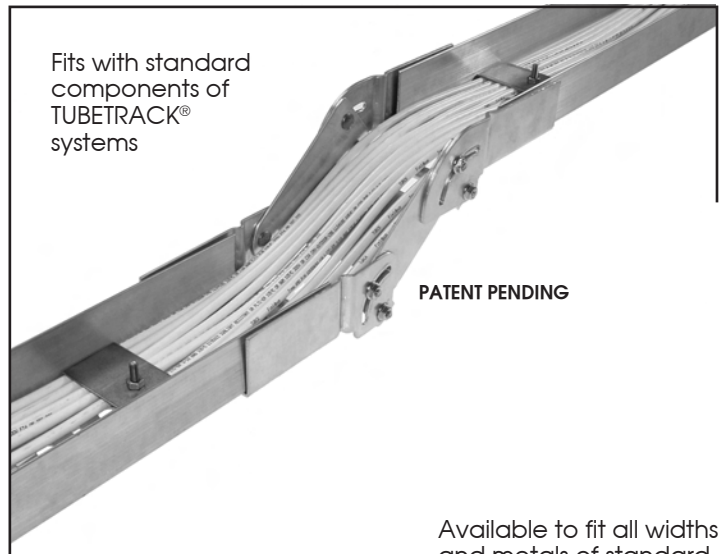

CABLE-RACE Double Adjustable Bends are used to form offsets in the run of channel. These quality channel fittings give you four advantages when changing elevation of channel support:

- Bends **adjust** quickly to the exact angle and offset needed
- Bends make this adjustment in a very **short span** of run
- Internal '**curbs**' protect cables over cut edge of channel
- Installed bend **locks solid** to support the overall structure

This unique design is ideal for the small, low voltage cables of modern instrumentation and control. The combination of adjustment mechanism and locking mechanism provides for very fast installation time with only a minimum of measurement required. They make it much easier to fit new cable runs over, under, and around the associated piping and framing of process machinery. Finished installations are neat with smooth curbs to raise cables over edges and are solid at all points.

CABLE-RACE Double Adjustable Bends fit standard TUBETRACK® channels and they are available in all standard widths and metals of TUBETRACK® channels as shown in the part number grid above. Connecting bolts sets are shipped with and included in the price of each TUBETRACK® fitting.

